



TELEPHONE MAN OF AMERICA

Earning Your Business Every Step of the Way!

Specializing in Telecom Equipment of all Brands, Carrier Services, Technician Services, Maintenance Agreements & Purchasing Excess Telecom Equipment!

I will always do my best to match or beat any competitors bid!


| Local: 863-614-1900| Toll Free: 866-770-4930| Fax: 888-782-3072|

Email: telephoneman@telephonemanofamerica.com |

URL: www.TelephonemanOfAmerica.com| URL: www.shop.telephonemanofamerica.com |

TalkSwitch VoIP

TS-50e Expansion Module

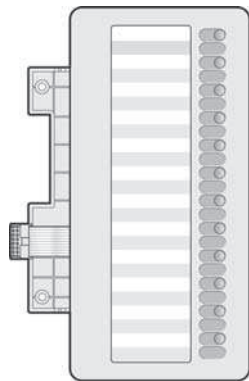

LED Expansion Module:
12-Key Paper Label

Description

The expansion module for the TS-550i phone provides 12 additional line/programmable feature keys for your phone. You can place the phone and expansion module on your desktop or you can wall-mount the phone and expansion module.


Up to two expansion modules are supported on a single phone. The expansion modules are only supported on the TS-550i phone.

Installation

Caution! To avoid damaging equipment, remove the power from the IP phone before connecting an expansion module. To install this expansion module correctly, please follow the procedures below.

Installing the expansion module

1. Remove power from the phone.
2. Remove the stand from the phone.
3. At the back of the phone, remove the rubber plug from the Accessory Expansion Module (AEM) port.
4. Plug the 12-pin cable from the expansion module into the AEM port on the back of the phone.
5. Place the connecting arm of the expansion module behind the IP phone and align the expansion module connecting holes with the connecting holes on the back of the phone.
6. Use the provided screws to connect the expansion module and phone firmly together.

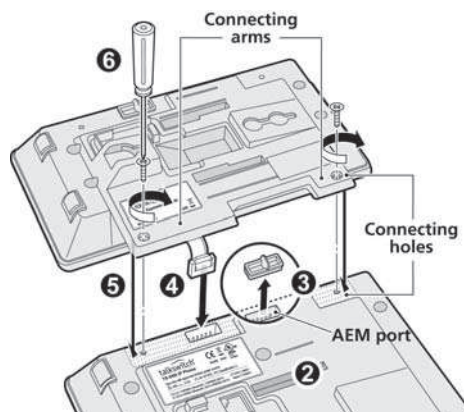


- If connecting another expansion module, repeat steps 2 to 6. A second expansion module is attached to the right side of the first expansion module.

Attaching the stands

Set the expansion module and phone stands to the same angle.

- Align the top tabs on the stands with the slots on the back of the expansion module and phone.
- Move each stand upward until it clicks into place.




Completing the installation

- Connect power to the phone. The phone and expansion modules will power up. The expansion modules use the electrical connection of the phone for power. Expansion modules do not require their own power source.
- After you power up your phone, the expansion module LEDs flash until communication with the phone is established.

Wall-mounting the phone and expansion module

- Remove the stands from the phone and expansion module.
- Ensure that the cables are properly connected to the phone, and then connect the expansion module to your phone, as previously described.
- Wall-mount the phone and expansion module using the keyholes in the back of the phone and expansion module.

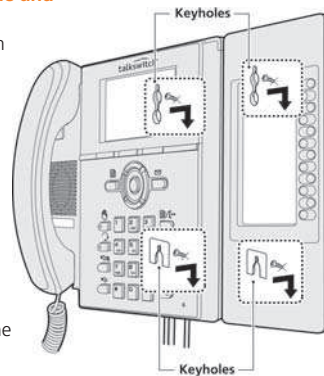

For additional information about line appearance and how to program the flexible keys, please read the *TS-550i User Guide* at <http://www.talkswitch.com/support>. Select **Documentation > Phones** then click on the appropriate link.

All specifications are subject to change without notice.

© 2009 TalkSwitch, a division of Centrepoint Technologies Inc. All rights reserved.
TalkSwitch®, the *TalkSwitch* logo, *Concero*®, *answers with intelligence*®, *owner friendly*™, *seller friendly*™, *vendor friendly*™ and *channel friendly*™ are registered trademarks or trademarks of Centrepoint Technologies Inc.

Rev. 9/24/2009

CT.TS005.016001